



Friedhelm TRAPP GmbH

Ostring 15 - 63533 Mainhausen - Zentrale: 06182/9294-5 - Fax: 06182/9294-69 - Mail: trapp@f-trapp.de

www.f-trapp.de

Supply bollard TVP-3500



Applicationexample TVP-3500

Description

Slimmer supply bollard for universal applications.

He has a modern electrical system equipped (with plugs, fuses and earth leakage current breakers).


The electrical equipment can be customized according to the space available on their wishes. The operation is also possible with the door closed.

This supply bollard is alternatively also be equipped with a water connection.



Supply bollard TVP-3500

Dimensioning

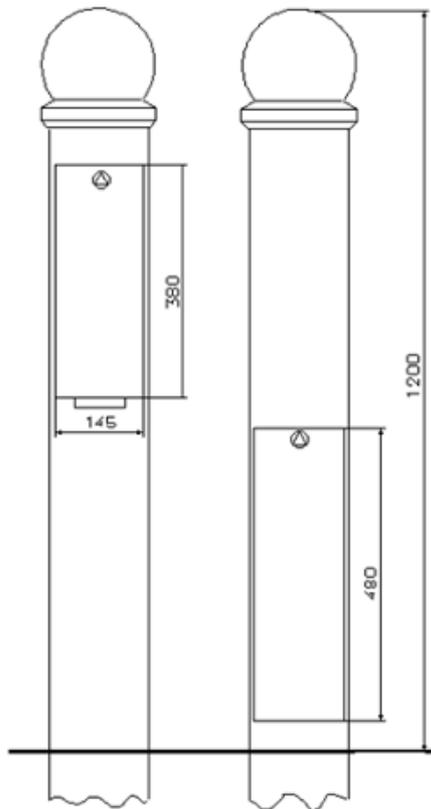

Technical specifications:

Casing:

- Steel tube \varnothing 159 x 4,5 mm, galvanized
- Decorative items made of cast aluminum
- 2 x Door (opposing) with triangular locking mechanism
- with integrated ground base 500 mm, cable entry opening and edge protection
- Paint finish in RAL color of your choice

Default installation:

- 4 x Earthed socket 16A, 230V
- 4 x MCB 16A, 1p, B
- 2 x earth leakage current breaker 25A, 0,03A, 2p
- 2 x Connections 5 x 10 mm²

Adapting the electrical and Water installation according to the space available according to customer requirements.