



Friedhelm TRAPP GmbH

Ostring 15 - 63533 Mainhausen - Zentrale: 06182/9294-5 - Fax: 06182/9294-69 - Mail: trapp@f-trapp.de

www.f-trapp.de

Supply bollard TVP-3000



Applicationexample TVP-300

Description

Modern supply bollard for many applications.

He has a modern electrical system equipped (with plugs, fuses and earth leakage current breakers).


The electrical equipment can be customized according to the space available on their wishes. The operation is also possible with the door closed.

This supply bollard is alternatively also be equipped with a water connection.



Supply bollard TVP-3000

Dimensioning

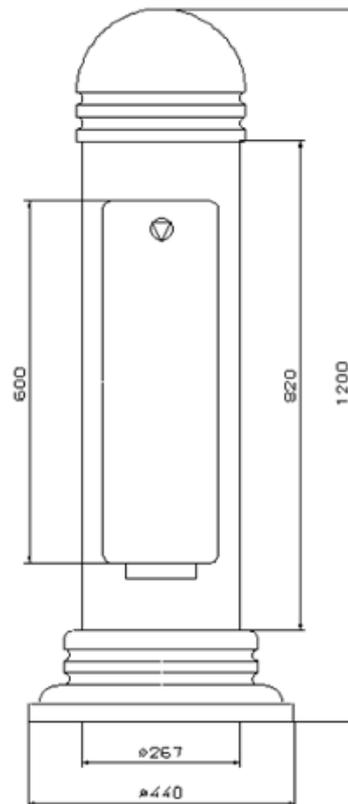

Technical specifications:

Casing:

- Steel tube \varnothing 267 x 5 mm, galvanized
- Decorative items made of cast aluminum
- Door with triangular locking mechanism and cable entry opening
- with integrated ground base 500 mm, cable entry opening and edge protection
- Paint finish in RAL color of your choice

Default installation:

- 2 x CEEform-socket 16A, 5p, 400V
- 2 x MCBs 16A, 3p, C
- 4 x Earthed socket 16A, 230V
- 4 x MCB 16A, 1p, B
- 2 x earth leakage current breaker 40A, 0,03A, 4p
- 2 x Connections 5 x 10 mm²

Adapting the electrical and Water installation according to the space available according to customer requirements.